

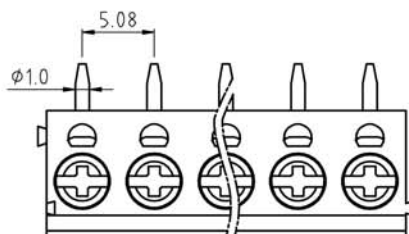


N=Number of contacts



P.C.B. LAYOUT

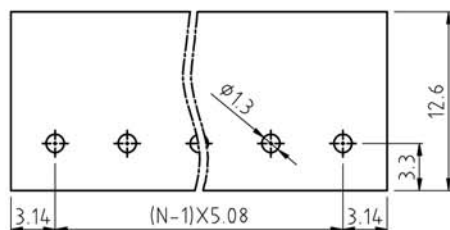

SIGN	DESCRIPTION	DATE	APPROVER
---	---	---	---

Technical Data:

Material:

Terminal: Copper Alloy Tin plated

screw: Steel galvanized with Cr3+ plated

Wire guard: Stainless steel

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 250VAC

Current rating: 15 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 14-24AWG

Mechanical:

Torque: 4.0kgf.cm/M3.0

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F11 - 8 - E XX - X 0 0 X 0

2	02	5	Green
-	-	6	Blue
24	24	8	Grey
		A	Black
		1	"-" SCREW
		2	"-/+ " SCREW

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F11 - 8 pitch 5.08mm
X.X ±0.30		- series
X.XX ±0.20	DRAWN: Yang Ming	2012.06.20
X° ±1°	UNITS: mm	REV: A
	SCALE: 3 / 1	PAGE: 1 / 1
		PART NO: F118EXX200X0
		DWG NO: 9F118E001A