


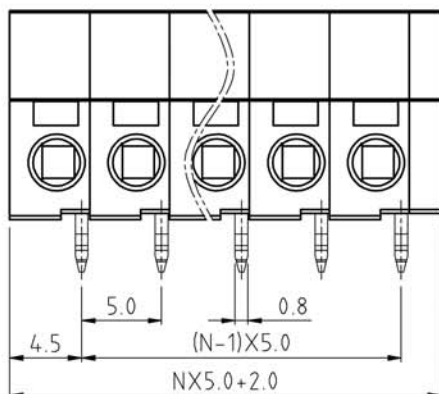


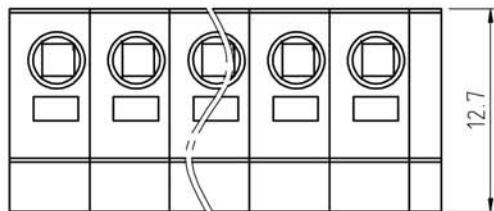

N=Number of contacts

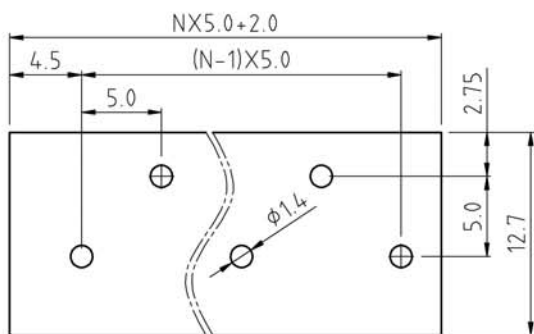

PCB. LAYOUT

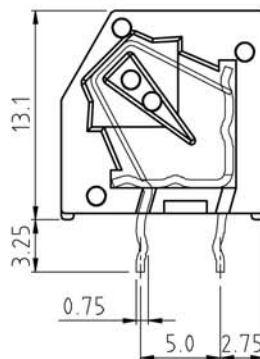

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Solder Pin: Copper Alloy Tin plated

Spring Clamp : stainless steel

Insulator body(housing) : Polyamide(Glass filled)(UL 94 V-0)

Electrical

Voltage rating: 300VAC

Current rating: 10 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire Range:14-22AWG

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F51 - 07 - 5 XX - 00 X 0

5	Green
6	Blue
8	Grey
A	Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F51 - 07 - pitch 5.0mm
X.X ±0.30	DRAWN: Yang Ming 2011,11,10	- series
X.XX ±0.20	UNITS: mm	PART NO: F51075XX00X0
X° ±1°	REV: A	DWG NO: 9F5107501A
SCALE: 3 / 1	PAGE: 1 / 1	