

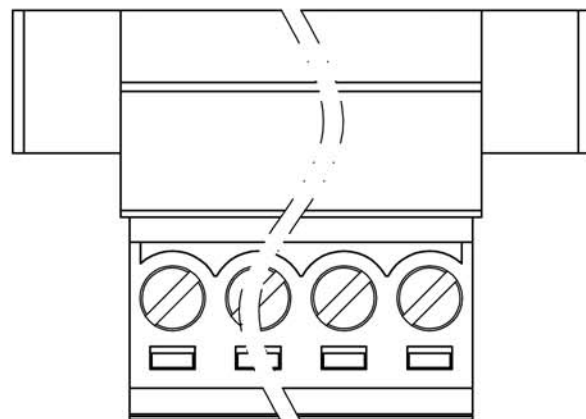


SIGN	DESCRIPTION	DATE	APPROVER

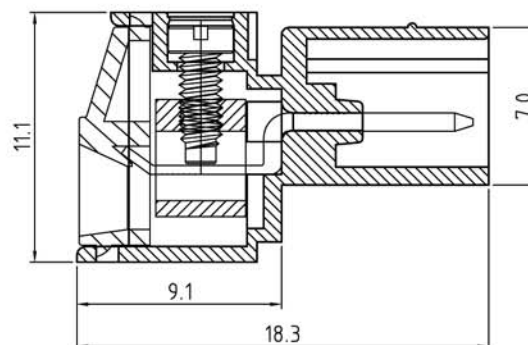

N=Number of contacts

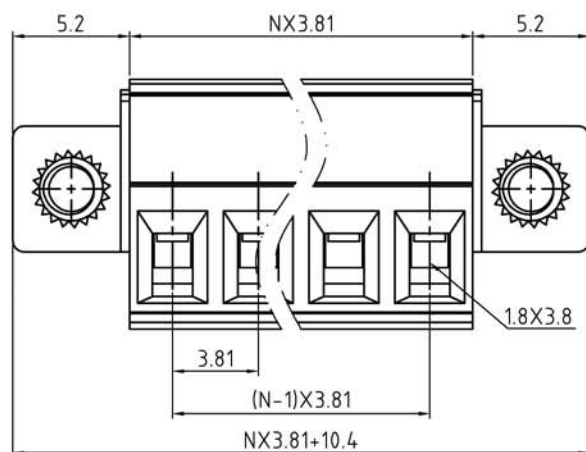

Technical Data:

Material:

Contact(metal housing): Copper Alloywith Ni plated

Terminal screw: Steel galvanized with Cr3+ plated

Pin: Copper Alloy,Tin plated.

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 16-24AWG

Mechanical:

Torque: 2.5kgf.cm/M2

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F72 - 1 - C XX - X 0 2 X 0

2 02
~ ~
24 24

5 Green
6 Blue
8 Grey
A Black

1 "-" SCREW

2 "-/+" SCREW

0 Without flange
1 With flange screw
2 Screw nut

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F72 - 1 Pitch 3.81mm
X.X ±0.30	DRAWN: Ling Yu 2013,07,31	-series (Screw nut)
X.XX ±0.20	UNITS: mm REV: A	PART NO: F721CXX102X0
X° ±1°	SCALE: 4 / 1 PAGE: 1 / 1	DWG NO: 9F721C021A