


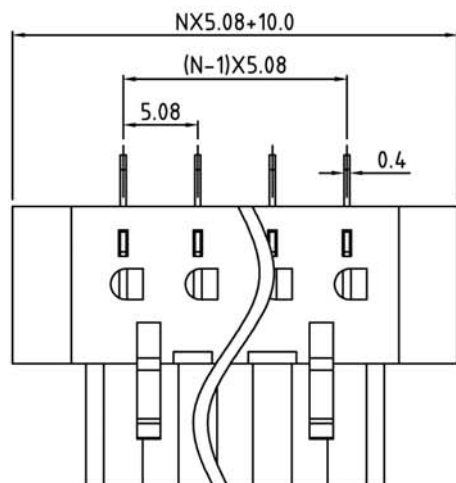


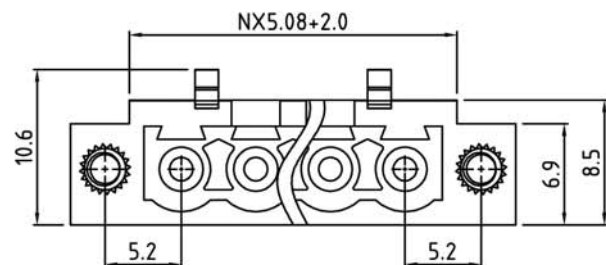

N=Number of contacts

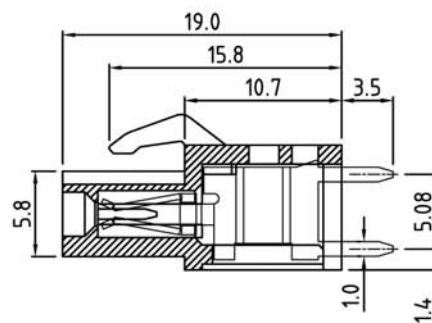

P.C.B LAYOUT

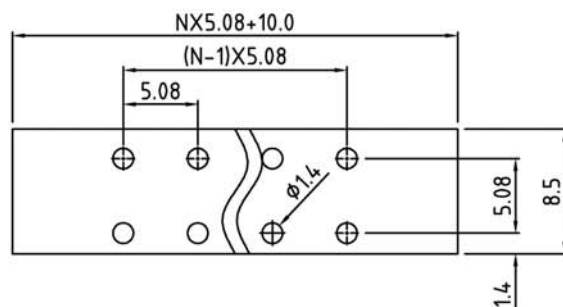

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Solder Pin: Copper Alloy with Tin plated

Metal nut: Copper Alloy

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16 Amps/way max

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F75-2-E XX-0 0 0 X 0

2 02
4 04
20 20

5 Green
6 Blue
A Black

1 Without flange
2 With flange Screw
3 With flange Screw nut

1 180°
2 90°

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F75 - 2 - pitch 5.08mm
X.X ±0.30	DRAWN: YangMing 2013,09,23	- seriesWith flange Screw
X.XX ±0.20	UNITS: mm	Nut-180D
X° ±1°	REV: A	PART NO: F752EXX013X0
SCALE: 3 / 1	PAGE: 1 / 1	DWG NO: 9F752E013A