

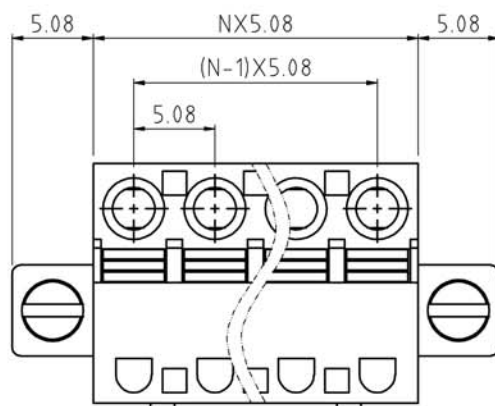


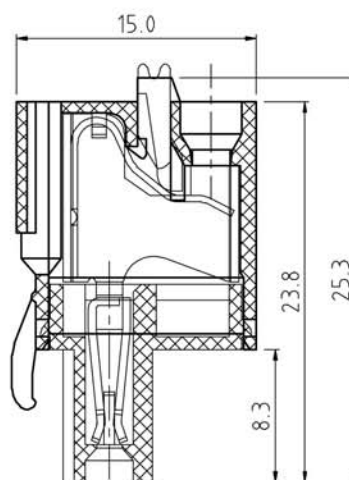

N=Number of contacts

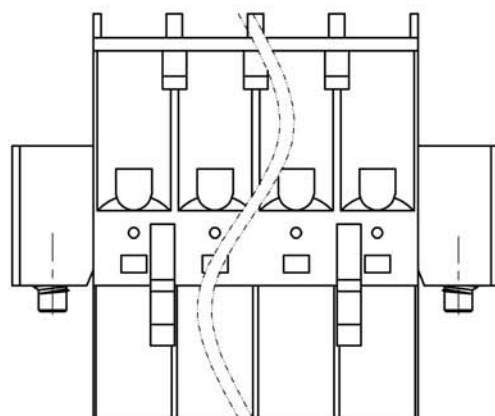

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Terminal: Copper Alloy Tin plated

Spring Clamp: Copper Alloy

Screw: Steel galvanized with Cr3+ plated

Insulator body(housing): Polyamide(UL94V-0)

Electrical:

Voltage rating: 300VAC

Current rating: 16 Amps/way max

Contact resistance: 20mΩ (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 12-26AWG

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F75-K-E XX-0 0 0 X 0

2 02 5 Green
24 24 6 Blue

1 "-" SCREW
2 "-/+" SCREW

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F75-K -Pitch 5.08mm
X.X ±0.30	DRAWN: Yang Ming 2012.06.29	-Series
X.XX ±0.20	UNITS: mm	PART NO: F75KEXX100X0
X° ±1°	REV: A	DWG NO: 9F75KE001A
	SCALE: 3 / 1	PAGE: 1 / 1