

1



2

3


4

5

| SIGN | DESCRIPTION | DATE | APPROVER |
|------|-------------|------|----------|
|      |             |      |          |
|      |             |      |          |

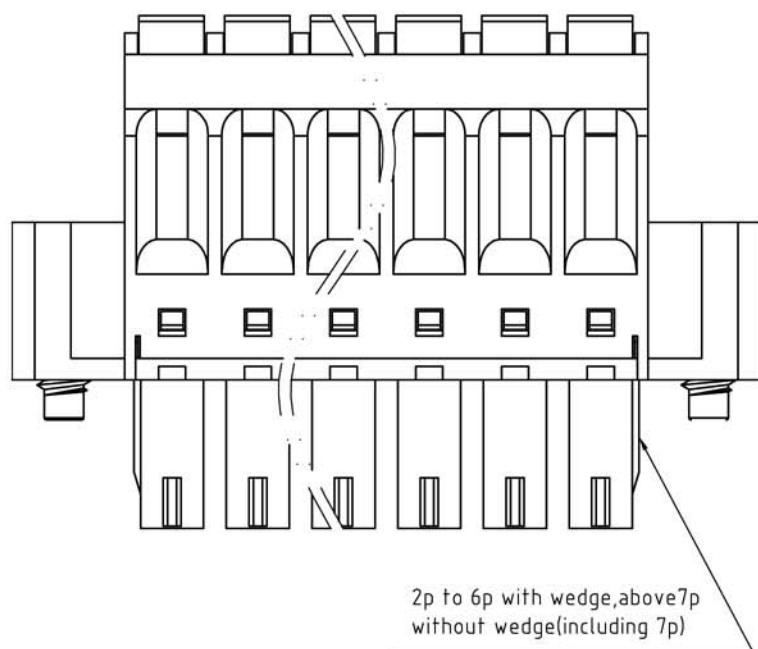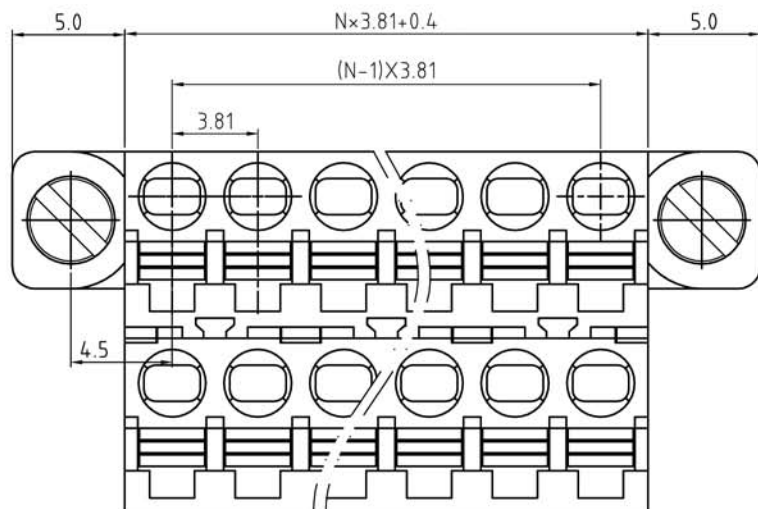

N=Number of contacts

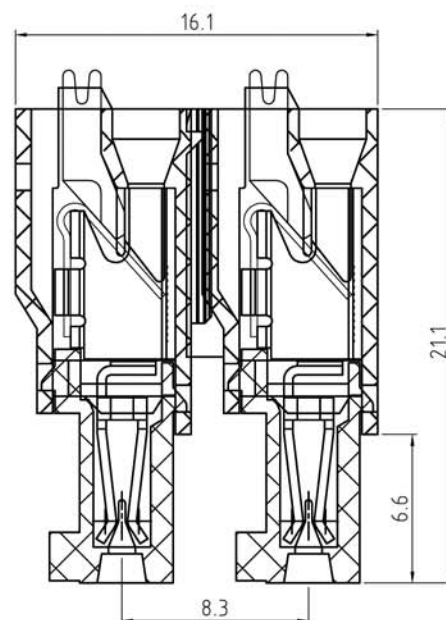

#### Technical Data:

#### Material:

terminal: Copper Alloy with Tin plated

Spring Clamp: Stainless steel

Insulator body(housing): Polyamide(UL94V-0)

#### Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 16-24AWG

#### Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

#### Ordering Information:

F73 - V - C XX - 0 0 1 X 0 0 0 0

2 02  
~ ~  
24 24

5 Green  
6 Blue  
8 Grey  
A Black

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co., LTD.

|            |                           |                          |
|------------|---------------------------|--------------------------|
| TOLERANCE  | APPROVED:                 | NAME:                    |
| X. ±0.50   | CHECKED:                  | F73 - V - pitch3.81mm    |
| X.X ±0.30  |                           | - series 有耳螺絲            |
| X.XX ±0.20 | DRAWN: Ling Yu 2014.07.12 |                          |
| X° ±1°     | UNITS: mm REV: A          | PART NO: F73VCXX001X0000 |
|            | SCALE: 4 / 1 PAGE: 1 / 1  | DWG NO: 9F73VC001A       |