

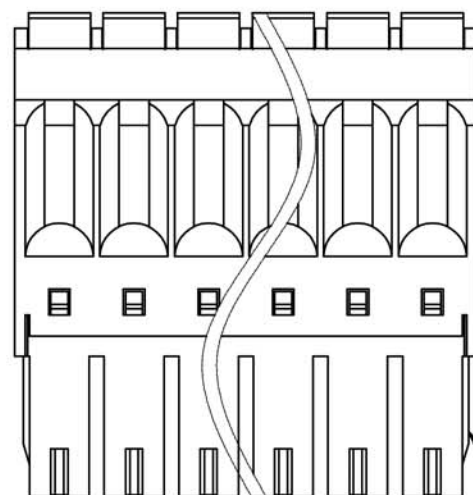


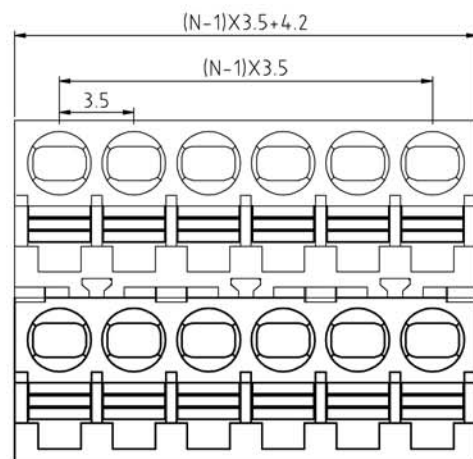

2p to 6p with wedge, above 7p
without wedge (including 7p)

N=Number of contacts

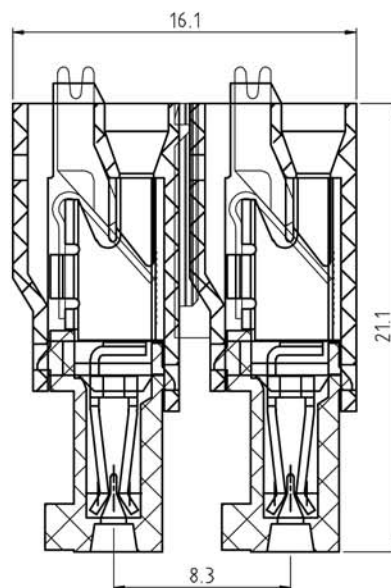

Technical Data:

Material:

terminal: Copper Alloy with Tin plated

Spring Clamp: Stainless steel

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 16-24AWG

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F73 - V - 3 XX - 0 0 1 X 0 000

2 02
- -
24 24

5 Green
6 Blue
8 Grey
A Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F73 - V - pitch 3.5mm
X.X ±0.30		- series
X.XX ±0.20	DRAWN: TONY 2017.07.10	
X° ±1°	UNITS: mm REV: A	PART NO: F73V3XX001X0000
	SCALE: 4 / 1 PAGE: 1 / 1	DWG NO: 9F73V1301A