


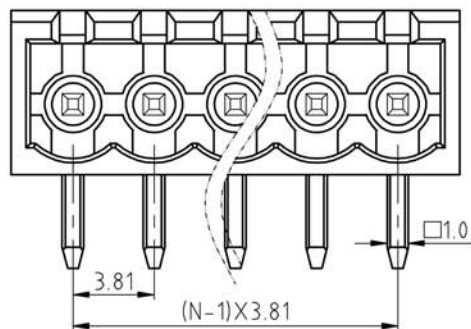


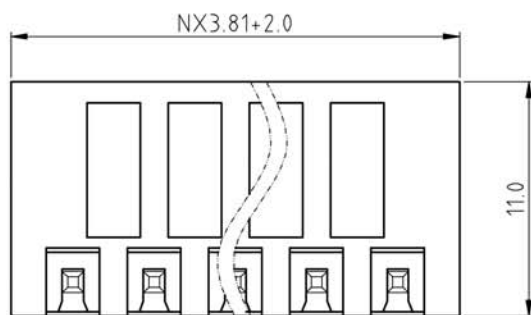

N=Number of contacts

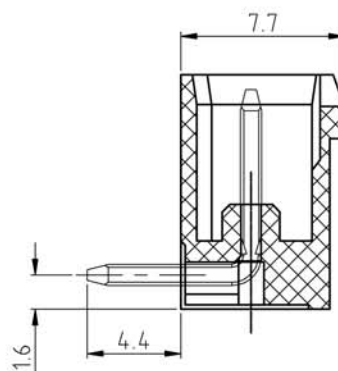

PCB. LAYOUT

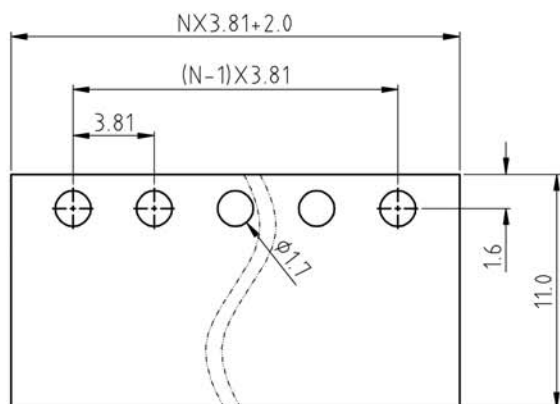

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Solder Pin: Copper Alloy Tin plated

Square nut : Copper Alloy Tin plated

Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F83-9-C XX 0 X X X 0

02	2Pin	5	Green
To	To	6	Blue
24	24Pin	A	Black
		0	Open
		1	Close
		2	Screw nut
		3	Square nut
		0	180°
		1	90°

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.30	CHECKED:	F83-9 Pitch 3.81mm
X.X ±0.15	DRAWN: YangMing 2012,10,17	- Close-90D-Series
X.XX ±0.05	UNITS: mm	PART NO: F839CXX011X0
X° ±1°	REV: A	DWG NO: 9F839C001A
	SCALE: 4 / 1	PAGE: 1 / 1