





SIGN	DESCRIPTION	DATE	APPROVER

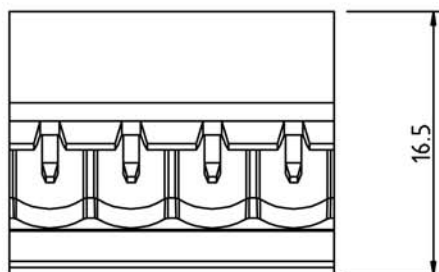

N=Number of contacts
Nx5.08

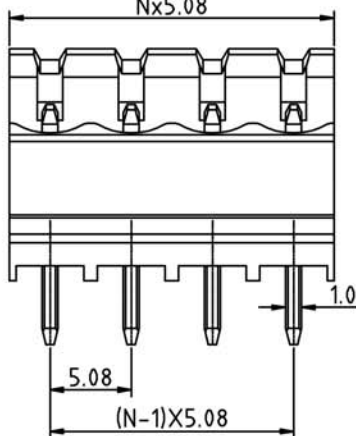

PCB. LAYOUT

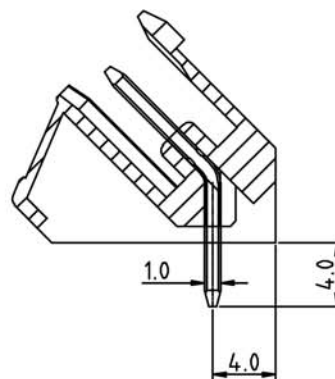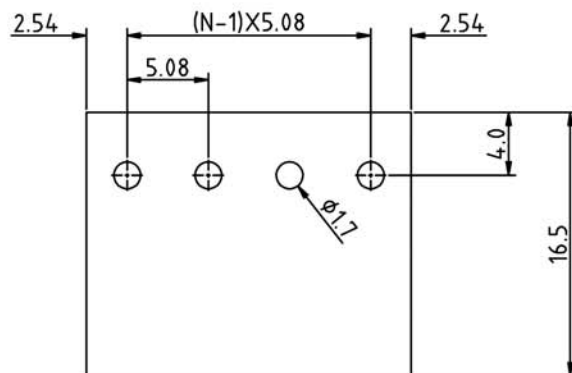

Technical Data:

Material:

Solder Pin: Copper Alloy, Tin plated
Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16A

Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to +105°C

Soldering temperature: +250°C, 5seconds Max.

Ordering Information:

F85-F-E XX-0 0 0 X 0

02	2Pin	5	Green
To	To	6	Blue
24	24Pin	A	Black
		0	Open
		1	Close
		2	Screw nut
		3	Square nut

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE X. ±0.30 X.X ±0.15 X.XX ±0.05 X° ±1°	APPROVED:	NAME: F85-F Pitch 5.08mm - Series(开口)
	CHECKED:	
	DRAWN: Ling Yu 2013,03,26	
	UNITS: mm REV: A	PART NO: F85FEXX000X0
	SCALE: 3 / 1 PAGE: 1 / 1	DWG NO: 9F85FE001A