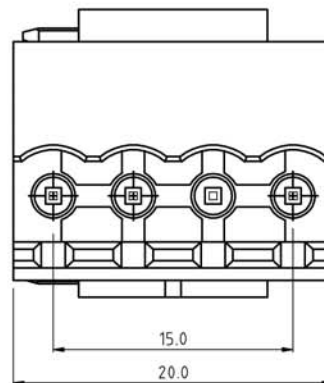
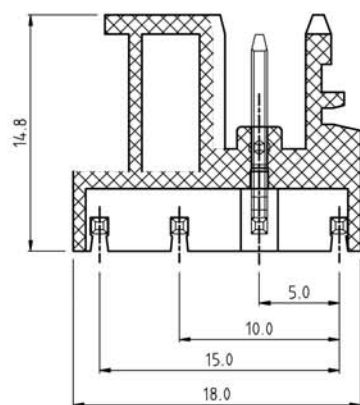
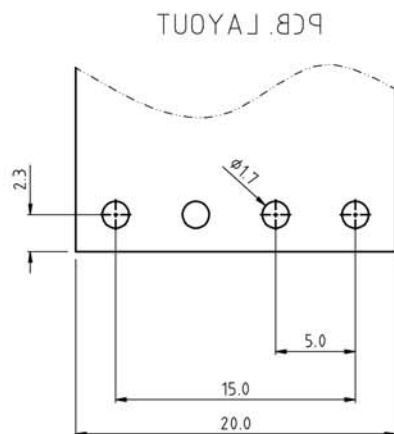


SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Solder Pin: Copper Alloy, Tin plated
Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16A

Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+250^{\circ}\text{C}$, 5seconds Max.

Ordering Information:

F85-9-5 XX-0 0 1 X 0

02 - 4Pin

5 Green
6 Blue
A Black

0 left

1 right

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ± 0.30	CHECKED:	F85-9 Pitch 5.0mm
X.X ± 0.15	DRAWN: YangMing 2012,06,30	-04Pole left
X.XX ± 0.05	UNITS: mm	PART NO: F859504000X0
X° $\pm 1^{\circ}$	REV: A	DWG NO: 9F8595003A
	SCALE: 3 / 1	PAGE: 1 / 1